

RG-ES210GS-P

10-Port Gigabit Smart Cloud Managed PoE Switch, 1 Combo Port



Highlights

- 10-port gigabit cloud managed switch with 8 PoE+ ports, 1 Combo Port
- Cost-Effective Smart Cloud Managed Switches
- IP Camera Recognition, Unique Value for CCTV Network
- Automatic Loop Prevention Ensures Service Continuity
- Lifetime management on Ruijie Cloud at anytime anywhere

Highlight Features

RG-ES200 Series Switches

Gigabit access switch fits the needs in SMB network



802.3at / 802.3af




Abundant Application Scenarios



Centralized Cloud Management

Cost-Effective Smart Cloud Managed Switches

ES200 adopts a light-weighted Cloud management design, providing faster response to support richer features.

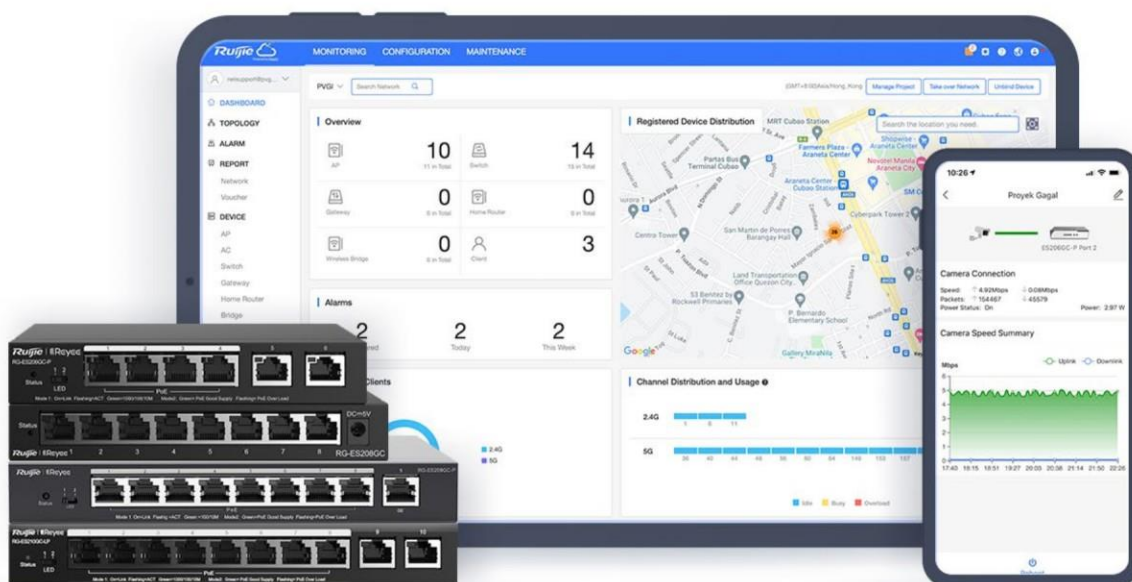

IP Camera/NVR
recognition



Automatic
Loop Prevention




Mobile VLAN
Configuration



Intelligent
PoE Adaptive

/ Highlight Features

Unique Value for CCTV Network

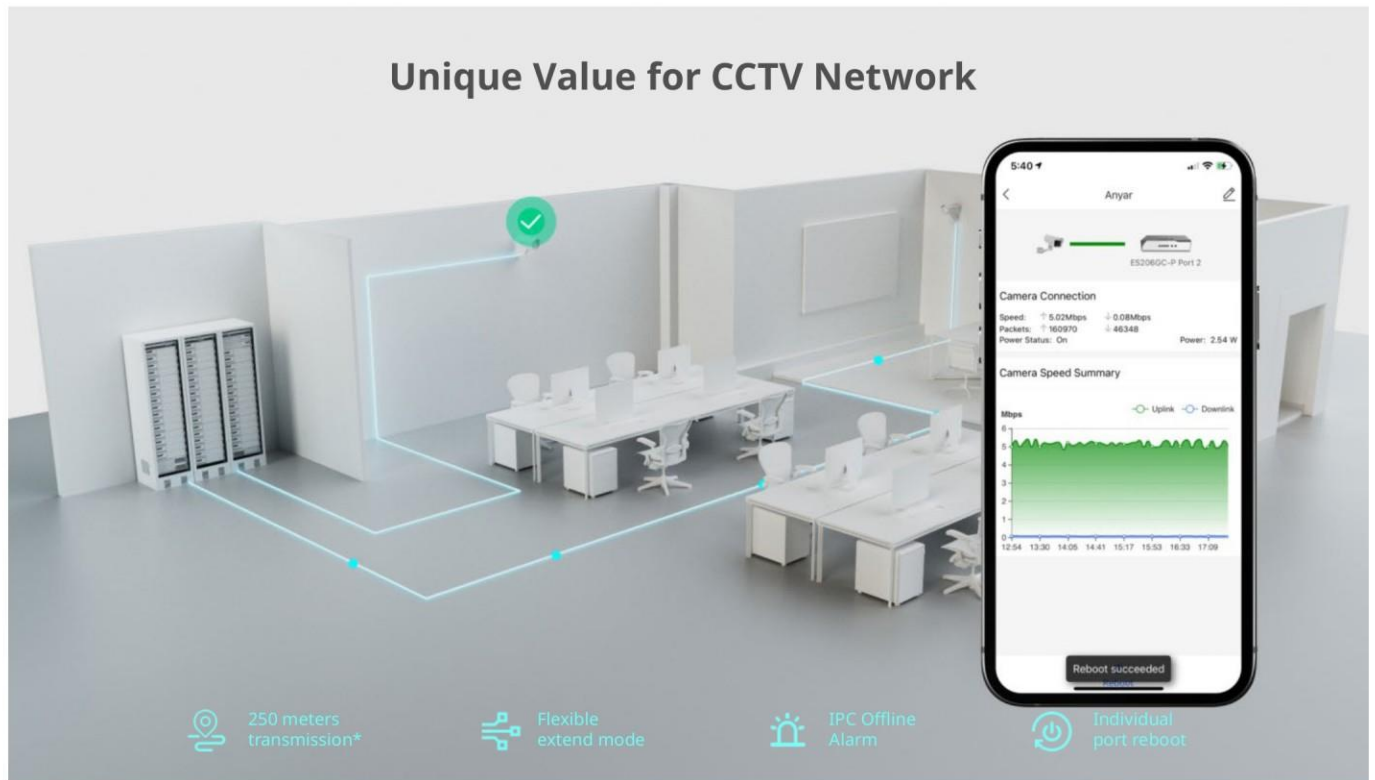

Automatic Loop Prevention Ensures Service Continuity

Network stays connected when network loop happens



Highlight Features

Cloud, Make Your Business Easy

- SON, zero touch provisioning to Cloud
- Configure VLANs on Ruijie Cloud APP
- Monitor switch statistics at anytime anywhere
- Easy maintenance, save onsite time and cost



/ Product Information

Model	RG-ES210GS-P
Product Category	Layer 2

/ Hardware Specifications

Model	RG-ES210GS-P
Product Information	
Warranty	3 years
Port Specifications	
Total number of RJ45 ports	10
Total number of optical ports	1
Number of 1GE combo ports	1
Number of 1GE SFP ports	1
Number of 10/100/1000BASE-T ports	10
Reset button	1
DIP switch	LED mode switch toggled to left (Mode 1): The port LED status indicates the status of traffic transmission. Solid green means that the port is link up, while blinking green means that the port is transmitting and receiving data. LED mode switch toggled to right (Mode 2): The port LED status indicates the PoE status. Solid green means that the port is supplying power, while blinking green means that the port is in power overload state.
Power Supply and Consumption	
PoE Out standard	PoE/PoE+ (IEEE 802.3af/at)
Number of PoE Out ports	8
Number of PoE/PoE+ Out ports	8
PoE budget	120 W

Hardware Specifications

Model	RG-ES210GS-P
PoE power pins	1–2 (+), 3–6 (-)
Power input	DC adapter: • Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz • Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz • Rated input current: 2.5 A Output: • Rated output voltage: 54 V DC • Maximum output current: 2.4 A
Maximum power consumption	10 W (with no PoE load) 130 W (with PoE full load)
Power supply	DC power adapter
System Specifications	
Flash memory	4 MB
Forwarding rate	14.8 Mpps
Switching capacity	20 Gbps(bit/s)
Dimensions and Weight	
Casing	Metal
Product dimensions (W x D x H)	202 mm x 108 mm x 28 mm (7.95 in. x 4.25 in. x 1.10 in.)
Weight	0.55 kg (1.21 lbs) (without packaging materials) 1.65 kg (3.64 lbs) (with packaging materials)
Shipping weight	1.65 kg (3.64 lbs)
Environment and Reliability	
Fan	Fanless design
Cooling	Natural cooling
Mounting options	Wall/Desktop
Hot swapping of cables	Hot swapping supported by the service port and power connector
MTBF	200,000 hours
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)

/ Hardware Specifications

Model	RG-ES210GS-P
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	−500 m to +5,000 m (−1,640.42 ft. to +16,404.20 ft.)
ESD protection	Air discharge: 8 kV Contact discharge: 6 kV
Surge protection	Service port: ±6 kV for common mode Power connector: ±4 kV for common mode and ±2 kV for differential mode
Certification and Regulatory Compliance	
EMC	EN 55032 EN IEC 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	EN 62368-1 IEC 62368-1
Certification	CE, CB

Software Specifications

Model	RG-ES210GS-P
Authentication	
RADIUS	No
802.1X authentication	No
Basic Configurations	
PoE watchdog	Yes
Uninterruptible power supply upon warm start	No
Online upgrade	Yes
Ethernet Switching	
Maximum number of VLANs	16
Maximum number of MAC address entries	4000
Interface flow control	Yes
IEEE 802.1Q VLAN	Yes
VLAN configuration supported on LAN ports	Yes
LLDP	No
LLDP-MED	No
Static MAC address	Yes
Static aggregation	No
LACP	No
Inbound or outbound rate limiting based on interface traffic	Yes
Gateway Features	
802.1p priority-based traffic classification	No
DSCP priority-based traffic classification	No

Software Specifications

Model	RG-ES210GS-P
Interface	
Jumbo frame length (MTU)	9216 bytes
EEE	Yes
Cable test	Yes
IP Routing	
IPv4 static route	No
IPv6 static route	No
OSPFv2	No
OSPFv3	No
IP Service	
ARP	No
IPv4 ping	No
IPv4 traceroute	No
ICMPv6	No
IPv6 ping	No
IPv6 traceroute	No
DNS client	Yes
DHCP client	Yes
Multicast	
IGMPv1 snooping	No
IGMPv2 snooping	No
Basic IGMPv3 snooping	No
Full IGMPv3 snooping	No
IGMP filtering	No

Software Specifications

Model	RG-ES210GS-P
IGMPv1, v2, and v3	No
Network Management and Monitoring	
Mirroring	Yes
HTTP login	Yes
HTTPS login	No
SON	Yes
Syslog	No
Camera detection	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	No
Security	
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	No
Extended MAC ACL	No
Extended IP ACL	No
IPv6 ACL	No
ARP anti-spoofing	No
CPU Protection Policy	Yes

Software Specifications

Model	RG-ES210GS-P
System Performance Capacity	
Recommended camera limit	200W H265: 40 400W H265: 20

Package Contents

Model	RG-ES210GS-P
Device	
Device	1
Accessories	
Power cord	1 x 0.8 m (2.62 ft.), 1 x 1 m (3.28 ft.), 1 x 1.2 m (3.94 ft.) or 1 x 1.5 m (4.92 ft.) Note: There are four power cord lengths. Please refer to the actual delivery.
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine **y**our **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>



**VOTRE PARTENAIRE
TECHNOLOGIQUE
POUR DES INFRASTRUCTURES IT
SÉCURISÉES ET PERFORMANTES**



EXPERTISE
Des solutions adaptées
à chaque environnement



CONFIANCE
Un partenaire fiable
à vos côtés



PERFORMANCE
Des infrastructures
sécurisées et évolutives



SUPPORT
Un accompagnement
technique de qualité



Des solutions IT innovantes pour
un monde connecté et sécurisé



**WIRELESS
RADIO**
Connectivité sans fil
haute performance



**RÉSEAUX &
SÉCURITÉ IT**
Des réseaux fiables
et sécurisés



**VIRTUALISATION
CLOUD**
Des solutions Cloud
flexibles et évolutives



CYBERSECURITY
Protéger vos données
et vos systèmes



**VIDÉO
PROTECTION**
Solutions de vidéosurveillance
intelligentes



**HCI STOCKAGE
SAUVEGARDE**
Stockage, sauvegarde
et haute disponibilité

SOLUTIONS IT | CYBERSÉCURITÉ | CLOUD | INFRASTRUCTURE RÉSEAU | STOCKAGE | PROTECTION



Département
Commercial

WCA



Vous accompagne



www.hafs-networks.com
Visitez notre site web



sales-ci@hafs-networks.com
Envoyez-nous un e-mail



(+225) 07 69 32 13 55
Contact commercial 1



(+225) 07 59 05 85 82
Contact commercial 2

Distributeur à Valeur Ajoutée de Solutions de Cybersécurité | Réseaux | Wi-Fi | HCI/Sauvegarde

