

RG-NBS3100-48GT4SFP-P

52-Port Gigabit Layer 2 Cloud Managed PoE Switch



Highlights

- 52-port gigabit Layer 2 managed PoE switch, 4 SFP uplinks
- Enterprise-class quality ensures high performance
- IP Camera Recognition, unique value for CCTV network
- Multiple security policies protect your network
- Lifetime management on Ruijie Cloud at anytime anywhere


Highlight Features

Enterprise-Class Quality Ensures High Performance

[Link Aggregation](#)

[IGMP Snooping](#)

[VLAN](#)

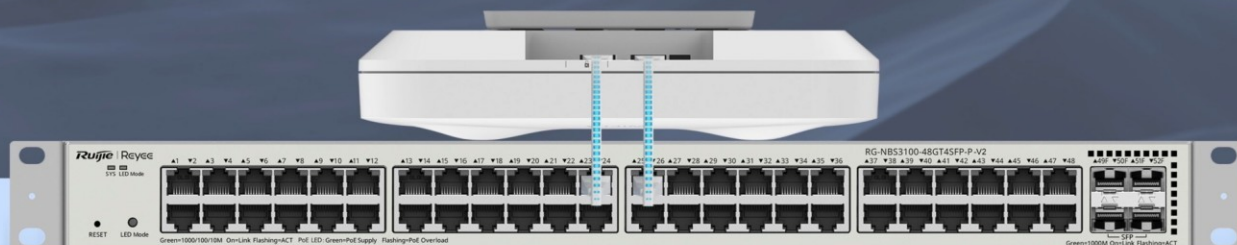

Enterprise-Class Quality Ensures High Performance

[Link Aggregation](#)

[IGMP Snooping](#)


[VLAN](#)



/ Highlight Features


Enterprise-Class Quality Ensures High Performance

Link Aggregation IGMP Snooping VLAN

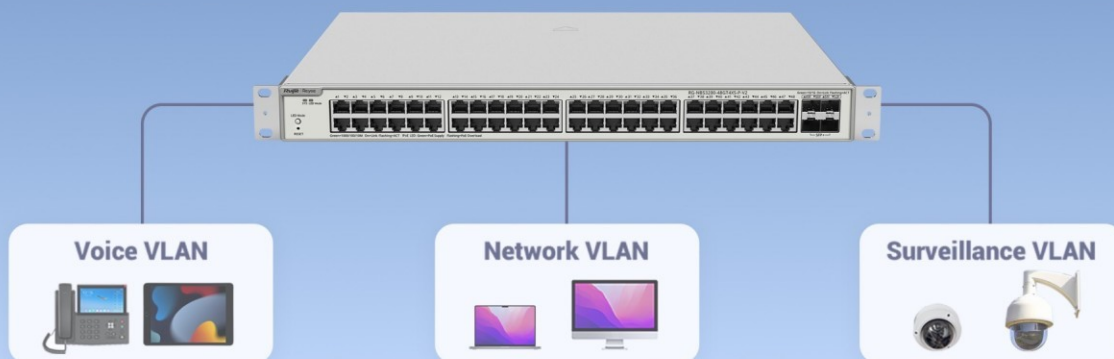

Multiple Security Policies Protect Your Network

Security Stability

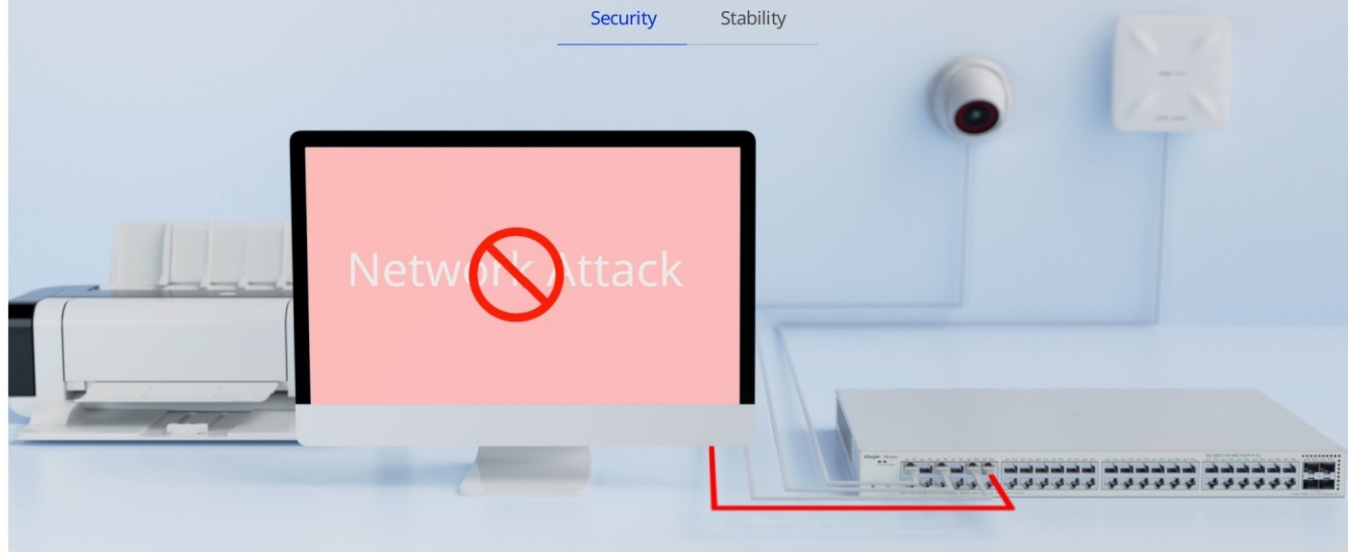

Highlight Features

Multiple Security Policies Protect Your Network

Security

Stability

CPU Utilization: 41%



Ruijie Cloud: Make Your Business Easy

- Support SON and zero-touch provisioning on Ruijie Cloud
- Monitor switch statistics at anytime, anywhere
- Configure VLANs on Ruijie Reyee App
- Simplify maintenance to reduce onsite time and costs



/ Product Information

Model	RG-NBS3100-48GT4SFP-P
Product Category	Layer 2

/ Hardware Specifications

Model	RG-NBS3100-48GT4SFP-P
Product Information	
Warranty	5 years
Port Specifications	
Total number of RJ45 ports	48
Total number of optical ports	4
Number of 1GE combo ports	No
Number of 1GE SFP ports	4
Number of 10GE SFP+ ports	No
Number of 10/100BASE-T ports	No
Number of 10/100/1000BASE-T ports	48
Number of 10/100/1000/2500BASE-T ports	No
Number of 100/1000/2.5G/5G/10GBASE-T ports	No
Module slots	No
Reset button	1
DIP switch	No
Power Supply and Consumption	
PoE Out standard	PoE/PoE+ (IEEE 802.3af/at)
Number of PoE Out ports	48
Number of PoE/PoE+ Out ports	48

/ Hardware Specifications

Model	RG-NBS3100-48GT4SFP-P
Number of PoE/PoE+/PoE++ Out ports	No
PoE budget	370 W
PoE power pins	1-2 (+), 3-6 (-)
Power input	220 V AC power supply: • Rated input voltage: 100 V AC to 240 V AC, 50/60 Hz • Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz • Maximum input current: 7 A
Maximum power consumption	61.57 W (with no PoE load) 447.69 W (with full PoE load)
Power output	No
Power supply	Fixed power supply
System Specifications	
RAM	512 MB
Flash memory	256 MB
Forwarding rate	77.38 Mpps
Switching capacity	104 Gbps(bit/s)
Dimensions and Weight	
Casing	Metal
Product dimensions (W x D x H)	440 mm x 357.6 mm x 43.6 mm (17.32 in. x 14.08 in. x 1.72 in.)
Weight	5.4 kg (11.9 lbs) (without packaging materials)
Shipping weight	7.13 kg (15.72 lbs)
Environment and Reliability	
Hot swapping of fan modules	No
Fan	2 x fixed fans
Cooling	Air cooling, side-to-rear airflow
Acoustic noise	25°C (77°F): 50 dB

/ Hardware Specifications

Model	RG-NBS3100-48GT4SFP-P
Mounting options	Rack
Hot swapping of cables	Service ports support hot swapping of cables.
MTBF	400,000 hours
Operating temperature	0°C to +50°C (32°F to 122°F)
Storage temperature	−40°C to +70°C (−40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: −500 m to +5,000 m (−1,640.42 ft. to +16,404.20 ft.) Storage altitude: −500 m to +5,000 m (−1,640.42 ft. to +16,404.20 ft.)
Corrosion class	No
ESD protection	Contact discharge: 6 kV Air discharge: 8 kV
Surge protection	Service port: ±6 kV for common mode Power connector: ±6 kV for both common mode and differential mode
Certification and Regulatory Compliance	
EMC	EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	IEC 62368-1
Certification	CE, FCC

Software Specifications

Model	RG-NBS3100-48GT4SFP-P
Authentication	
RADIUS	Yes
802.1X authentication	Yes
Port-based 802.1X authentication	Yes
MAC address-based 802.1X authentication	Yes
Guest VLAN	Yes
Basic Configurations	
PoE watchdog	Yes
Online upgrade	Yes
Ethernet Switching	
Maximum number of VLANs	4094
Maximum number of MAC address entries	16000
Interface flow control	Yes
MAC address-based VLAN	No
IP subnet – based VLAN assignment	No
IEEE 802.1Q VLAN	Yes
Basic QinQ	No
VLAN configuration supported on LAN ports	Yes
Voice VLAN	Yes
STP (IEEE 802.1d)	Yes
RSTP (IEEE 802.1w)	Yes
MSTP (IEEE 802.1s)	Yes
LLDP	Yes

Software Specifications

Model	RG-NBS3100-48GT4SFP-P
LLDP-MED	Yes
Static MAC address	Yes
MAC address filtering	Yes
Static aggregation	Yes
LACP	Yes
Inbound or outbound rate limiting based on interface traffic	Yes
Gateway Features	
802.1p priority-based traffic classification	Yes
DSCP priority-based traffic classification	Yes
Egress queues based on 802.1p and DSCP priorities	Yes
SP	Yes
WRR	Yes
SP+WRR	Yes
Global QoS	Yes
Interface	
Jumbo frame length (MTU)	9216 bytes (interface configuration mode)
EEE	Yes
Cable test	Yes
IP Routing	
IPv4 static route	No
IPv6 static route	No
OSPFv2	No
OSPFv3	No

Software Specifications

Model	RG-NBS3100-48GT4SFP-P
IP Service	
Maximum number of ARP entries	1000
ARP	Yes
IPv4 ping	Yes
IPv4 traceroute	Yes
IPv6	Yes
ICMPv6	Yes
IPv6 ping	Yes
IPv6 traceroute	Yes
DNS client	Yes
DNSv6 client	Yes
DHCP relay	No
DHCP server	No
DHCP client	Yes
Multicast	
IGMPv1 snooping	Yes
IGMPv2 snooping	Yes
Basic IGMPv3 snooping	Yes
Full IGMPv3 snooping	No
IGMP filtering	Yes
IGMPv1, v2, and v3	No
Network Management and Monitoring	
Port mirroring	Yes
Mirroring	Yes

Software Specifications

Model	RG-NBS3100-48GT4SFP-P
HTTP login	Yes
HTTPS login	Yes
RLOG	Yes
SON	Yes
Syslog	Yes
Client auto-discovery	Yes
PoE service failure	Yes
PoE power overload	Yes
SSH	No
Camera detection	Yes
Loop alarm	Yes
MAC address entries	Yes
IP address pool conflicts	Yes
Full ARP table	No
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	Yes
Reliability	
System dual backup	Yes (Only supported on devices with a factory-installed software version of ReyeeOS 2.320 or later)
Enabling dual backup for the partition Uboot (based on a single flash memory)	Yes
Load balancing	No

Software Specifications

Model	RG-NBS3100-48GT4SFP-P
ERPS	Yes
Security	
Maximum number of ACEs	Number of ACEs in the inbound direction of an interface: 1900 Number of ACEs in the outbound direction of an interface: 0
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	Yes
Extended MAC ACL	Yes
Extended IP ACL	Yes
IPv6 ACL	Yes
IP-MAC-port binding	Yes
ARP anti-spoofing	Yes
IP source guard	Yes
CPU Protection Policy	Yes
System Performance Capacity	
Recommended camera limit	200 W H265: 200 400 W H265: 100

Package Contents

Model	RG-NBS3100-48GT4SFP-P
Device	
Device	1
Accessories	
Rubber pad	4
Power cord retention clip	1
Screw	6 M4 x 8 mm cross recessed countersunk head screws
Grounding cable	1 x 1 m (3.28 ft.)
Power cord	1 x 1.5 m (4.92 ft.)
Rack-mount bracket	2
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>



VOTRE PARTENAIRE TECHNOLOGIQUE POUR DES INFRASTRUCTURES IT SÉCURISÉES ET PERFORMANTES



EXPERTISE
Des solutions adaptées
à chaque environnement



CONFIANCE
Un partenaire fiable
à vos côtés



PERFORMANCE
Des infrastructures
sécurisées et évolutives



SUPPORT
Un accompagnement
technique de qualité



Des solutions IT innovantes pour
un monde connecté et sécurisé



**WIRELESS
RADIO**
Connectivité sans fil
haute performance



**RÉSEAUX &
SÉCURITÉ IT**
Des réseaux fiables
et sécurisés



**VIRTUALISATION
CLOUD**
Des solutions Cloud
flexibles et évolutives



CYBERSECURITY
Protéger vos données
et vos systèmes



**VIDÉO
PROTECTION**
Solutions de vidéosurveillance
intelligentes



**HCI STOCKAGE
SAUVEGARDE**
Stockage, sauvegarde
et haute disponibilité

SOLUTIONS IT | CYBERSÉCURITÉ | CLOUD | INFRASTRUCTURE RÉSEAU | STOCKAGE | PROTECTION



Département
Commercial

WCA



Vous accompagne



www.hafs-networks.com
Visitez notre site web



sales-ci@hafs-networks.com
Envoyez-nous un e-mail



(+225) 07 69 32 13 55
Contact commercial 1



(+225) 07 59 05 85 82
Contact commercial 2

Distributeur à Valeur Ajoutée de Solutions de Cybersécurité | Réseaux | Wi-Fi | HCI/Sauvegarde

