

# RG-RAP72

## Wi-Fi 7 BE3600 Ceiling-Mount Access Point



### Highlights

- AI-powered Wi-Fi 7 ceiling-mount AP with dual-radio performance
- Support AI Optimization (WIO 3.0)
- Easy installation, compact size
- New circular design, seamlessly blending with different decoration styles
- Tailored for business needs with Reyee Mesh, standalone portal, and AI roaming features

## Highlight Features

Next-Gen Speed, Within Reach



WiFi-7


Pro Performance, Starter Price

Wi-Fi 7 | 2.5 GbE Port | BE3600



## / Highlight Features

### Enterprise-level Algorithm for Signal Optimization

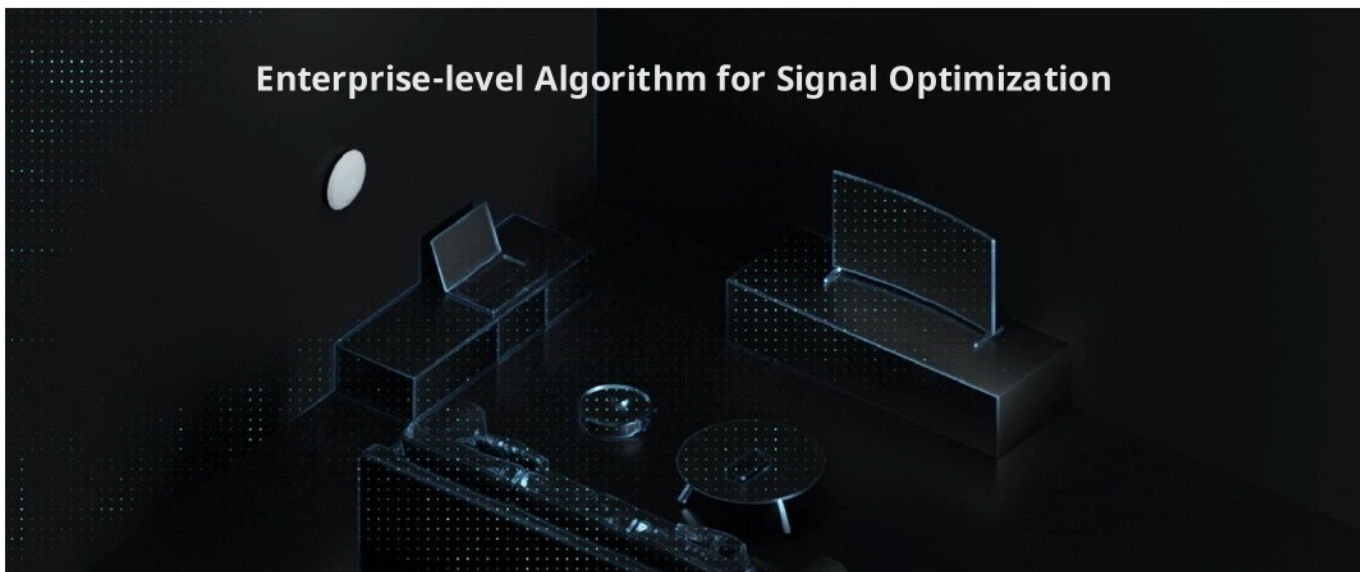

### Pro Performance, Starter Price

Coverage: 110 m<sup>2</sup> vs **Standard 140 m<sup>2</sup> @ 5 GHz**



Traditional WiFi 6 devices: 110 m<sup>2</sup> / 1184.03 sq. ft

**RAP72: 140 m<sup>2</sup> / 1506.95 sq. ft**

### Actual Speed: 2,714 Mbps (Lab Environment)

**2700 Mbps**



## / Highlight Features

### Where Minimalism Meets Signal Mastery

From Polygon Concepts to  
Optimal Omni-Directional Form




### Where Minimalism Meets Signal Mastery

Seamless Integration  
in Modern Spaces



### Where Minimalism Meets Signal Mastery

Seamless Integration  
in Modern Spaces

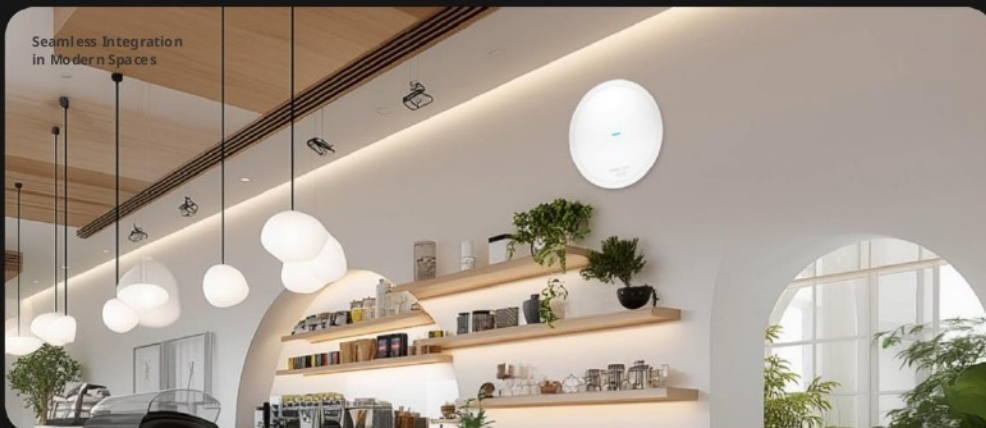

## Highlight Features

### Where Minimalism Meets Signal Mastery




Seamless Integration  
in Modern Spaces



### One More Device, Endless Possibilities

Office Area

100+ Concurrent Connections



Game Zone

< 10 ms Latency Guaranteed



Home scene

- 20 °C to 60 °C Operational Range



### Evolving Design, Consistent Excellence

2022: RAP2200E



2023: RAP2260  
Square Form Factor



2024: RAP72Pro  
with Circular Signal Matrix



2025: RAP72  
with Circular Signal Matrix



Ø195 mm x Ø1 mm (7.68 in. x 1.01 in.)

# Highlight Features

## 4K QAM

Delivers up to 20% faster data speeds for ultra-responsive streaming and gaming



Single Link






Multi-Link

## Multi-Link Operation

Ensures seamless connectivity and reduced lag by simultaneously bonding 2.4 GHz and 5 GHz bands

## Preamble Puncturing

Maximizes usable bandwidth in crowded environments by bypassing interference-prone channels



## Multiple Resource Units

Boosts network efficiency and capacity for smooth performance with multiple connected devices

## Cloud, Make Your Business Easy

Reyee Mesh  
Reduce Cabling Costs

Standalone AP Portal  
Free & Easy

WIO 3  
Powered by AI

Heatmap  
Visualizing the Installation Process

## / Product Information

| Model        | RG-RAP72   |
|--------------|------------|
| Product Type | Ceiling AP |

## / Hardware Specifications

| Model                      | RG-RAP72                                                                                                                                                                                                                                                                                                                  |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wi-Fi Radio                |                                                                                                                                                                                                                                                                                                                           |
| 6 GHz Wi-Fi                | No                                                                                                                                                                                                                                                                                                                        |
| 5 GHz Wi-Fi                | Wi-Fi 4 (IEEE 802.11a/n)<br>Wi-Fi 5 (IEEE 802.11ac)<br>Wi-Fi 6 (IEEE 802.11ax)<br>Wi-Fi 7 (IEEE 802.11be)                                                                                                                                                                                                                 |
| 2.4 GHz Wi-Fi              | Wi-Fi 4 (IEEE 802.11b/g/n)<br>Wi-Fi 6 (IEEE 802.11ax)<br>Wi-Fi 7 (IEEE 802.11be)                                                                                                                                                                                                                                          |
| Operating band             | IEEE 802.11b/g/n/ax/be, 2.400 GHz to 2.4835 GHz<br>IEEE 802.11a/n/ac/ax/be, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz<br><br>Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands. |
| Radio design               | Dual-radio<br>4 spatial streams<br>• 2.4 GHz: 2 x 2, MU-MIMO<br>• 5 GHz: 2 x 2, MU-MIMO                                                                                                                                                                                                                                   |
| FEM                        | iFEM                                                                                                                                                                                                                                                                                                                      |
| 6 GHz channel width        | No                                                                                                                                                                                                                                                                                                                        |
| 5 GHz channel width        | Auto/20/40/80/160 MHz                                                                                                                                                                                                                                                                                                     |
| 2.4 GHz channel width      | Auto/20/40 MHz                                                                                                                                                                                                                                                                                                            |
| Maximum wireless data rate | 3570 Mbps                                                                                                                                                                                                                                                                                                                 |
| 6 GHz wireless data rate   | No                                                                                                                                                                                                                                                                                                                        |
| 5 GHz wireless data rate   | 2882 Mbps                                                                                                                                                                                                                                                                                                                 |

## / Hardware Specifications

| Model                            | RG-RAP72                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.4 GHz wireless data rate       | 688 Mbps                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Maximum transmit power           | <p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union &amp; United Kingdom</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>Myanmar:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia:</p> <p>2400–2483.5 MHz, EIRP ≤ 27 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 23 dBm</p> <p>Egypt:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5850 MHz, EIRP ≤ 30 dBm</p> |
| Maximum transmit power (6 GHz)   | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Maximum transmit power (5 GHz)   | <p>Combined power: 25.7 dBm (single-stream power: 21 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Maximum transmit power (2.4 GHz) | <p>Combined power: 25 dBm (single-stream power: 22 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Coverage range                   | <p>140 m<sup>2</sup> (1506.95 square ft.)</p> <p>Note: The data is obtained in an ideal environment without obstruction. The signal coverage radius depends on client performance and environmental interference.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Modulation                       | <p>OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, and 64-QAM @ 48/54 Mbps</p> <p>DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## / Hardware Specifications

| Model                                  | RG-RAP72                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                        | MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, and 4096-QAM<br>OFDMA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Receive sensitivity                    | 11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps)<br>11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps)<br>11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15)<br>11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9)<br>11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9)<br>11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9)<br>11ac: 160 MHz: -76 dBm (MCS0), -50 dBm (MCS9)<br>11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11)<br>11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11)<br>11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11)<br>11ax: 160 MHz: -76 dBm (MCS0), -49 dBm (MCS11)<br>11be: 20 MHz: -85 dBm (MCS0), -52 dBm (MCS13)<br>11be: 40 MHz: -82 dBm (MCS0), -49 dBm (MCS13)<br>11be: 80 MHz: -82 dBm (MCS0), -46 dBm (MCS13)<br>11be: 160 MHz: -79 dBm (MCS0), -44 dBm (MCS13) |
| Antenna                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Antenna                                | 2.4 GHz: 2 built-in omnidirectional antennas<br>5 GHz: 3 built-in omnidirectional antennas                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Antenna horizontal orientation         | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Antenna vertical orientation           | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Antenna gain (6 GHz)                   | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Antenna gain (5 GHz)                   | 4.44 dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Antenna gain (2.4 GHz)                 | 3.23 dBi                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimensions and Weight                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Product dimensions (diameter x height) | Ø195 mm x 41 mm (Ø7.68 in. x 1.61 in.) (excluding the mounting bracket)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Color                                  | White                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Weight                                 | ≤ 0.6 kg (1.32 lbs.) (without packaging materials)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Shipping weight                        | ≤ 1 kg (2.2 lbs.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## / Hardware Specifications

| Model                                   | RG-RAP72                                                                                                                                                                                                        |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port Specifications                     |                                                                                                                                                                                                                 |
| Number of 10/100/1000/2500BASE-T ports  | 1                                                                                                                                                                                                               |
| Reset button                            | 1                                                                                                                                                                                                               |
| LEDs                                    | 1 x system status LED                                                                                                                                                                                           |
| Power Supply and Consumption            |                                                                                                                                                                                                                 |
| Power supply                            | <ul style="list-style-type: none"><li>• DC power adapter</li><li>• PoE/PoE+</li></ul> <p>Note: If both the DC power adapter and PoE/PoE+ are available for power supply, the DC power adapter is preferred.</p> |
| Local power supply                      | Yes, one DC power connector (12 V, 1.5 A)                                                                                                                                                                       |
| Dimensions of the DC connector          | Outer diameter: 5.5 mm (0.22 in.)<br>Inner diameter: 2.1 mm (0.08 in.)<br>Depth: 10 mm (0.39 in.)                                                                                                               |
| PoE In standard                         | <ul style="list-style-type: none"><li>• IEEE 802.3af (PoE)</li><li>• IEEE 802.3at (PoE+)</li></ul>                                                                                                              |
| PoE budget                              | No                                                                                                                                                                                                              |
| Maximum power consumption               | 14 W                                                                                                                                                                                                            |
| Environment and Reliability             |                                                                                                                                                                                                                 |
| Operating temperature                   | 0°C to 40°C (32°F to 104°F)                                                                                                                                                                                     |
| Storage temperature                     | -40°C to +70°C (-40°F to +158°F)                                                                                                                                                                                |
| Operating humidity                      | 5% RH to 95% RH (non-condensing)                                                                                                                                                                                |
| Storage humidity                        | 5% RH to 95% RH (non-condensing)                                                                                                                                                                                |
| Mounting options                        | Ceiling/Wall                                                                                                                                                                                                    |
| IP rating                               | IP41                                                                                                                                                                                                            |
| Surge protection                        | Ethernet port: ±2 kV for common mode                                                                                                                                                                            |
| MTBF                                    | 400,000 hours                                                                                                                                                                                                   |
| Certification and Regulatory Compliance |                                                                                                                                                                                                                 |
| RoHS                                    | Yes                                                                                                                                                                                                             |

# / Hardware Specifications

| Model                 | RG-RAP72                                                                                           |
|-----------------------|----------------------------------------------------------------------------------------------------|
| Safety compliance     | EN 62368-1                                                                                         |
| EMC                   | EN 55032<br>EN 55035<br>EN 61000-3-3<br>EN 61000-3-2<br>EN 301489-1<br>EN 301489-3<br>EN 301489-17 |
| RF                    | EN 300 328<br>EN 301 893<br>EN 300 440                                                             |
| Certification         | CE, CB, ISED, cTUVus                                                                               |
| System Specifications |                                                                                                    |
| Flash memory          | 256 MB                                                                                             |
| RAM                   | 512 MB DDR3                                                                                        |

## Software Specifications

| Model                                             | RG-RAP72                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic Configurations                              |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| AP mode                                           | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Routing mode                                      | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Internet access mode                              | Static IP address<br>Static IPv6 address<br>Dynamic IP address<br>Dynamic IPv6 address<br>PPPoE                                                                                                                                                                                                                                                                                                                                |
| Interface                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| IPTV transparent transmission                     | No                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Ethernet Interface                                |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| PPPoE clients                                     | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Ethernet Switching                                |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| IEEE 802.1Q VLAN                                  | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |
| WLAN                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Maximum number of associated wireless clients     | 64 (2.4 GHz)<br>511 (5 GHz)<br>511 (2.4 GHz and 5 GHz enabled)                                                                                                                                                                                                                                                                                                                                                                 |
| Recommended number of associated wireless clients | <ul style="list-style-type: none"><li>● Support for IEEE 802.11ax and 160 MHz:<br/>16 (2.4 GHz)<br/>84 (5 GHz)<br/>100 (2.4 GHz and 5 GHz enabled)</li><li>● Support for IEEE 802.11ax and 80 MHz:<br/>16 (2.4 GHz)<br/>52 (5 GHz)<br/>68 (2.4 GHz and 5 GHz enabled)<ul style="list-style-type: none"><li>● Support for IEEE 802.11ac:<br/>12 (2.4 GHz)<br/>32 (5 GHz)<br/>44 (2.4 GHz and 5 GHz enabled)</li></ul></li></ul> |
| Maximum number of SSIDs                           | 8                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Radio-based client limiting                       | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Layer 2 isolation                                 | Yes                                                                                                                                                                                                                                                                                                                                                                                                                            |

## Software Specifications

| Model                                                                    | RG-RAP72 |
|--------------------------------------------------------------------------|----------|
| OFDMA                                                                    | Yes      |
| WMM                                                                      | Yes      |
| DFS                                                                      | Yes      |
| MLO                                                                      | Yes      |
| 4K-QAM                                                                   | Yes      |
| Different SSIDs for the same VLAN                                        | Yes      |
| Enabling/Disabling MLO                                                   | Yes      |
| AP load balancing                                                        | Yes      |
| Beamforming                                                              | Yes      |
| 802.11k/v roaming                                                        | Yes      |
| Fast transition (802.11r)                                                | Yes      |
| Layer 2 roaming                                                          | Yes      |
| Layer 3 roaming                                                          | Yes      |
| AI roaming                                                               | Yes      |
| PSK authentication                                                       | Yes      |
| Static allowlist                                                         | Yes      |
| Adjusting the transmit power for beacon and probe frames                 | Yes      |
| Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)                        | Yes      |
| OWE (Enhanced Open)<br>WPA3-SAE<br>WPA2-PSK/WPA3-SAE                     | Yes      |
| Number of blocklists and allowlists based on MAC addresses (single SSID) | 256      |
| Number of global blocklists/allowlists                                   | 256      |

## Software Specifications

| Model                                         | RG-RAP72                                                                                                         |
|-----------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Mesh management                               | Yes                                                                                                              |
| AP Mesh                                       | Yes                                                                                                              |
| AP portal authentication                      | Yes                                                                                                              |
| Maximum number of devices that can be managed | 300                                                                                                              |
| One-Click Network Optimization                | Yes                                                                                                              |
| Static blocklist                              | Yes                                                                                                              |
| IP Service                                    |                                                                                                                  |
| ARP binding                                   | Yes                                                                                                              |
| IPv4 ping                                     | Yes                                                                                                              |
| IPv6 ping                                     | Yes                                                                                                              |
| Traceroute                                    | Yes                                                                                                              |
| Static/Dynamic NAT                            | Yes                                                                                                              |
| DHCP server                                   | Yes                                                                                                              |
| IPv6                                          | Yes                                                                                                              |
| Authentication                                |                                                                                                                  |
| 802.1X authentication                         | Yes                                                                                                              |
| Network Management and Monitoring             |                                                                                                                  |
| Wireless repeater mode                        | Yes                                                                                                              |
| Web login information                         | Single-device login address: 10.44.77.254<br>Network-wide login address: 10.44.77.253<br>Default password: admin |
| Network-wide configuration and management     | Yes                                                                                                              |
| Ruijie Reyee App management                   | Yes                                                                                                              |
| eWeb management                               | Yes                                                                                                              |
| Ruijie Cloud management                       | Yes                                                                                                              |

## Software Specifications

| Model                                                               | RG-RAP72 |
|---------------------------------------------------------------------|----------|
| SNMP                                                                | Yes      |
| Configuration synchronization among the app, eWeb, and Ruijie Cloud | Yes      |
| Displaying device information on Ruijie Cloud                       | Yes      |

## Package Contents

| Model            | RG-RAP72                                                                                                                                                                                                                        |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Package Contents |                                                                                                                                                                                                                                 |
| Package Contents | 1 x AP<br>1 x Mounting bracket<br>4 x Cross pan head screws (ST4.2 x 20 mm)<br>4 x Plastic expansion anchors ( $\phi$ 9 x 25.4 mm)<br>1 x User Manual<br>1 x Warranty Card<br>1 x Key to security lock<br>1 x Alignment sticker |
| Accessories      |                                                                                                                                                                                                                                 |
| Power adapter    | No                                                                                                                                                                                                                              |

**Ruijie** | ReYee

 **R**edefine your easy network



**Ruijie Networks Co., Ltd.**

Official Website: <https://Reyee.Ruijie.com>



## VOTRE PARTENAIRE TECHNOLOGIQUE POUR DES INFRASTRUCTURES IT SÉCURISÉES ET PERFORMANTES



**EXPERTISE**  
Des solutions adaptées  
à chaque environnement



**CONFIANCE**  
Un partenaire fiable  
à vos côtés



**PERFORMANCE**  
Des infrastructures  
sécurisées et évolutives



**SUPPORT**  
Un accompagnement  
technique de qualité



Des solutions IT innovantes pour  
un monde connecté et sécurisé



**WIRELESS  
RADIO**  
Connectivité sans fil  
haute performance



**RÉSEAUX &  
SÉCURITÉ IT**  
Des réseaux fiables  
et sécurisés



**VIRTUALISATION  
CLOUD**  
Des solutions Cloud  
flexibles et évolutives



**CYBERSECURITY**  
Protéger vos données  
et vos systèmes



**VIDÉO  
PROTECTION**  
Solutions de vidéosurveillance  
intelligentes



**HCI STOCKAGE  
SAUVEGARDE**  
Stockage, sauvegarde  
et haute disponibilité

SOLUTIONS IT | CYBERSÉCURITÉ | CLOUD | INFRASTRUCTURE RÉSEAU | STOCKAGE | PROTECTION



Département  
Commercial

WCA



***Vous accompagne***



[www.hafs-networks.com](http://www.hafs-networks.com)  
Visitez notre site web



[sales-ci@hafs-networks.com](mailto:sales-ci@hafs-networks.com)  
Envoyez-nous un e-mail



(+225) 07 69 32 13 55  
Contact commercial 1



(+225) 07 59 05 85 82  
Contact commercial 2

Distributeur à Valeur Ajoutée de Solutions de Cybersécurité | Réseaux | Wi-Fi | HCI/Sauvegarde

